


SBTシリーズ

フェイスミルアーバH型 (センタースルー仕様)

FACE MILL ARBOR (Type H)

センタースルー対応

Thru-the-tool Coolant Available

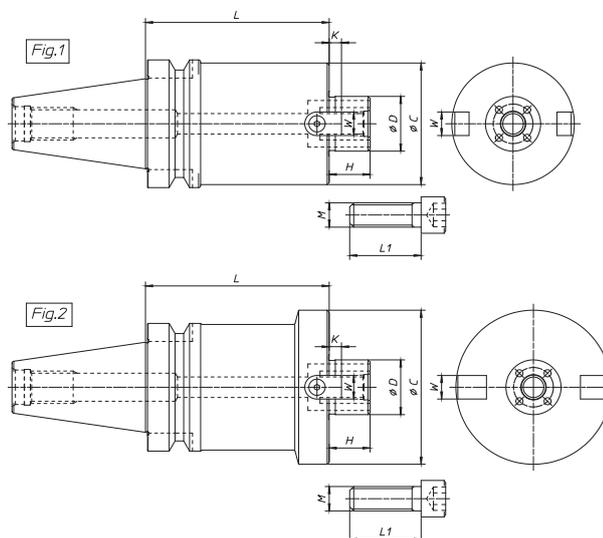

※SBTタイプはBT2面拘束主軸対応ツールリングです。(BTタイプも対応致します)

MODEL	FIG.	φD	φC	L	H	W	K	CLAMP BOLT		カッター 最小ボス径	N/W (kg)		
								M	L1				
SBT30	-FM16H-37-035	1	16	37	35	16	8	4	M8	25L	φ 30	0.6	
	-FM22H-47-045	2	22	47	45	17	10	5	M10	30L	φ 37	0.7	
	-FM22H-60-045			60	45	17	10	5	M10	30L	φ 50	0.9	
	-FM27H-60-045			27	60	45	20	12	6	M12	35L	φ 50	0.9
SBT40	-FM16H-37-040	1	16	37	40	16	8	4	M8	25L	φ 30	1.1	
	-060				60							1.3	
	-FM22H-47-045	1	22	47	45	17	10	5	M10	30L	φ 37	1.3	
	-060				60							1.5	
	-090				90							1.9	
	-150				150							2.7	
	-FM22H-60-045				45							17	10
	-060	60	1.7										
	-090	90	2.4										
	-FM27H-60-045	1	27	60	45	20	12	6	M12	35L	φ 50	1.5	
	-060				60							1.8	
	-090				90							2.4	
	-FM27H-76-060	2	27	76	60	20	12	6	M12	35L	φ 66	2.1	
	-090				90							2.7	
	-FM32H-96-060				32							96	60
	SBT40	-FM22.225H-47-045	1	22.225	47	45	17	8	3.5	M10	30L	φ 39	1.3
		-060				60							1.5
		-090				90							1.9
		-150				150							2.7
		-FM25.4H-70-060				45							17
-060		60	1.47										
-090		90	2.4										
-FM25.4H-70-060		1	25.4	70	60	22	9.5	5	M12	35L	φ 59	1.9	
-090					90							2.6	
-105					105							3.0	
-FM31.75H-76-060		1	31.75	76	60	30	12.7	7	M12	35L	φ 62	2.1	
-090					90							2.8	
-FM31.75H-96-060					96							60	30

※取り付けるカッターの仕様によってはキャップボルトを変更する必要があります。


HSKシリーズ

フェイスミルアーバH型 (センタースルー仕様)

FACE MILL ARBOR (Type H)

センタースルー対応

Thru-the-tool Coolant Available

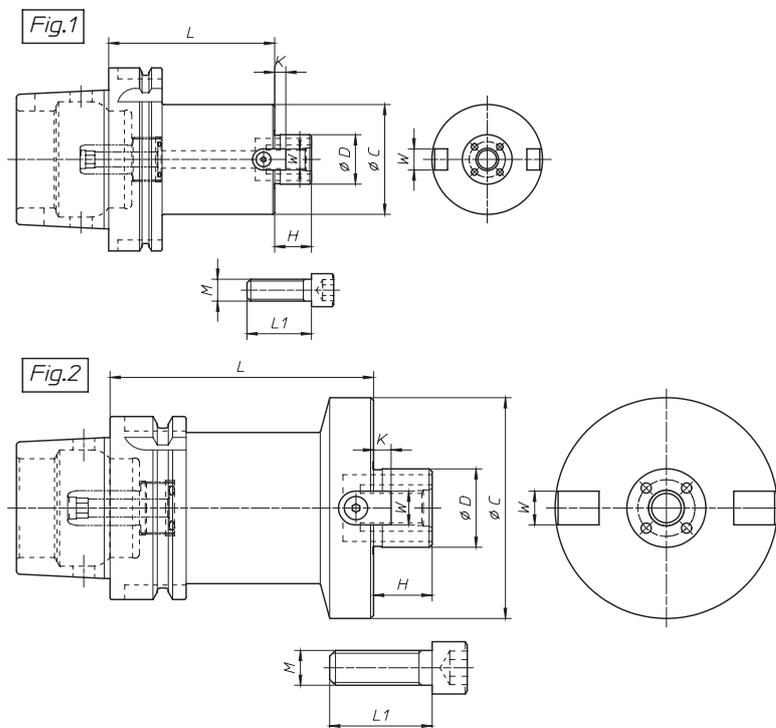

MODEL	FIG.	φD	φC	L	LH	H	W	K	CLAMP BOLT		カッター 最小ボス径	N/W (kg)	
									M	L1			
HSKA50	-FM16H-37-060	1	16	37	60	34	16	8	5	M8	25L	φ 30	0.7
	-FM22H-47-060				60	34							0.9
	-090	1	22	47	90	64	17	10	5	M10	30L	φ 37	1.3
	-FM27H-60-060				60	34							20
	-090	2	27	60	90	64	20	12	6	M12	35L	φ 50	1.5
	-FM22.225H-47-060				60	34							17
-090	1	22.225	47	90	64	17	8	3.5	M10	30L	φ 39	1.3	
HSKA63				-FM16H-37-060	1							16	37
	-090	90	64	1.2									
	-FM22H-47-045	1	22	47	45	19	17	10	5	M10	30L	φ 37	1.1
	-060				60	34							1.2
	-090				90	64							1.6
	-150				150	124							2.4
	-FM27H-60-060	1	27	60	60	34	20	12	6	M12	35L	φ 50	1.5
	-090				90	64							2.1
	-FM32H-85-060	2	32	85	60	34	22	14	7	M16	40L	φ 71	1.7
	-090				90	64							2.3
	-FM22.225H-47-045	1	22.225	47	45	19	17	8	3.5	M10	30L	φ 39	1.0
	-060				60	34							1.1
	-090				90	64							1.5
	-150				150	124							2.4
	-FM25.4H-70-060	2	25.4	70	60	34	22	9.5	5	M12	35L	φ 59	1.6
-090	90				64	2.3							
-150	150				124	3.7							
-FM31.75H-76-060	2	31.75	76	60	34	30	12.7	7	M12	35L	φ 62	1.8	
-090				90	64							2.5	

※取り付けるカッターの仕様によってはキャップボルトを変更する必要があります。
 ※標準にて固定式クーラントパイプを付属しています。(可動式をお使いの場合は別途オプションとなります。)

HSKシリーズ

フェイスミルアーバH型 (センタースルー仕様)

FACE MILL ARBOR (Type H)

センタースルー対応

Thru-the-tool Coolant Available

MODEL	FIG.	φD	φC	L	LH	H	W	K	CLAMP BOLT		カッター 最小ボス径	N/W (kg)		
									M	L1				
HSKA100	-FM22H-47-105	1	22	47	105	76	17	10	5	M10	30L	φ 37	3.1	
	-150				150	121							3.7	
	-200				200	171							4.3	
	-250				250	221							5	
	-FM22H-60-060	1	22	60	60	31	17	10	5	M10	30L	φ 50	2.8	
					-105	105							76	3.7
					-150	150							121	4.7
					-200	200							171	5.8
	-250	250	221	6.9										
	-FM27H-60-060	1	27	60	60	31	20	12	6	M12	35L	φ 50	2.8	
					-090	90							61	3.5
					-150	150							121	4.8
	-FM27H-76-060	1	27	76	60	31	2	12	6	M12	35L	φ 66	3.2	
					-090	90							61	4.3
					-150	150							121	6.4
	-FM32H-96-060	1	32	96	60	31	22	14	7	M16	40L	φ 82	3.9	
					-090	90							61	5.5
					-150	150							121	7.6
	-FM40H-100-075	1	40	100	75	46	26	16	8.5	MBA-M20F		φ 85	5	
					-105	105							76	6.8
					-FM22.225H-47-105	1							22.225	47
	-150	150	121	3.7										
	-200	200	171	4.4										
	-250	250	221	5										
	-FM22.225H-60-060	1	22.225	60	60	31	17	8	3.5	M10	30L	φ 52	2.8	
					-105	105							76	3.7
					-150	150							121	4.8
					-200	200							171	5.8
	-250	250	221	6.9										
	-FM25.4H-70-060	1	25.4	70	60	31	22	9.5	5	M12	35L	φ 59	3	
					-090	90							61	3.9
					-150	150							121	5.7
					-200	200							171	7.2
	-FM31.75H-76-060	1	31.75	76	60	31	30	13	7	M16	40L	φ 62	3.3	
					-090	90							61	4.3
					-105	105							76	4.9
					-150	150							121	6.4
	-200	200	171	8.2										
	-FM31.75H-96-060	1	31.75	96	60	31	30	13	7	M16	40L	φ 82	3.9	
					-090	90							61	5.6
-105					105	76							6.4	
-150					150	121							9	
-200	200	171	11.8											
-FM38.1H-100-060	1	38.1	100	60	31	34	15.9	9	NBA-M20F		φ 73	4.1		
				-090	90							61	5.3	
				-105	105							76	5.7	
				-150	150							121	7.9	

※取り付けるカッターの仕様によってはキャップボルトを変更する必要があります。
 ※標準にて固定式クーラントパイプを付属しています。(可動式をお使いの場合は別途オプションとなります。)